

CoeLux® 45 LC

Datasheet / pg 1 of 2


The CoeLux® 45 LC is the smallest option amongst CoeLux® optical systems artificially reproducing the natural light and visual appearance of the sky and the sun through an approx. 0.5 square meter window with a breakthrough opportunity for indoor architecture by creating the sensation of infinite space.

The smallest size of the product allows installations in lower ceiling spaces compared to the CoeLux® 45 HC.

CoeLux® 45 LC is designed for ceiling installation. Warranty period: 2 years.



Technical drawings:

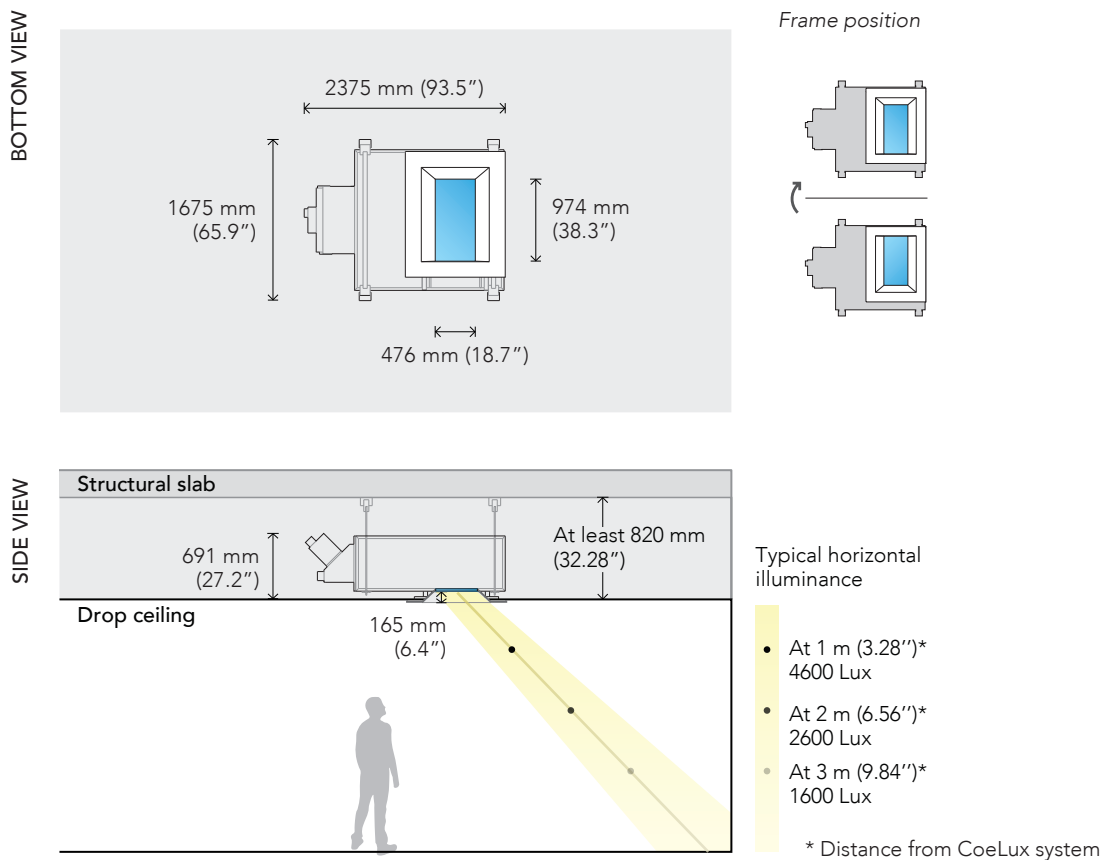

Frame Type:

Recessed (Polyurethane)

Flush (Wood)



CoeLux® 45 LC

Datasheet/ pg 2 of 2

∞ INFINITE SKY

☀ SHINING SUN

Technical informations:

DEVICE DIMENSIONS	2375 x 1675 x 691 mm	93.5 x 65.9 x 27.2"
SKY-LIGHT SIZE	974 x 476 mm	38.3 x 18.7"
WEIGHT	300 kg	660 lb
SUGGESTED AREA FOR A UNIT	Up to 20 m2	215 ft2

Performance informations:

TYPE OF SOURCE	LED not dimmable
POWER INPUT	100-240 V~ 50/60 Hz
MAX POWER CONSUMPTION	300 W
TYPICAL POWER CONSUMPTION	270 W
TOTAL LIGHT OUTPUT	4200 lm
LUMEN MAINTENANCE	LM70 >50000 h

Environmental informations:

Equipment intended for internal use

MIN. / MAX. OPERATING TEMPERATURE -10°C /40°C

MAX. OPERATING RELATIVE HUMIDITY 95% (non-condensing)

CERTIFIED



> CoeLux® 45 LC, Smeg S.p.a., Milan (IT)

