

# CoeLux® 60 HC



Datasheet / pg 1 of 2

For those who prefer the more dramatic effect of tropical light, CoeLux® 60 HC offers an additional solution for a skylight featuring a more vertical sunlight, which guarantees the minimum level of glare. CoeLux® 60 HC features an approx. 1.5 square meter window with a spotlight-effect beam projected on the floor rather than the wall. The CoeLux® 60 HC is designed for ceiling installation.

Warranty period: 2 years.



## Technical drawings:

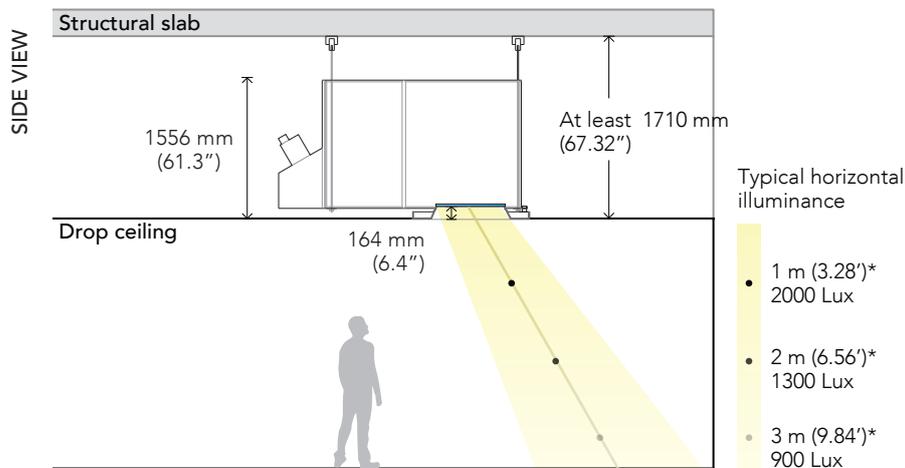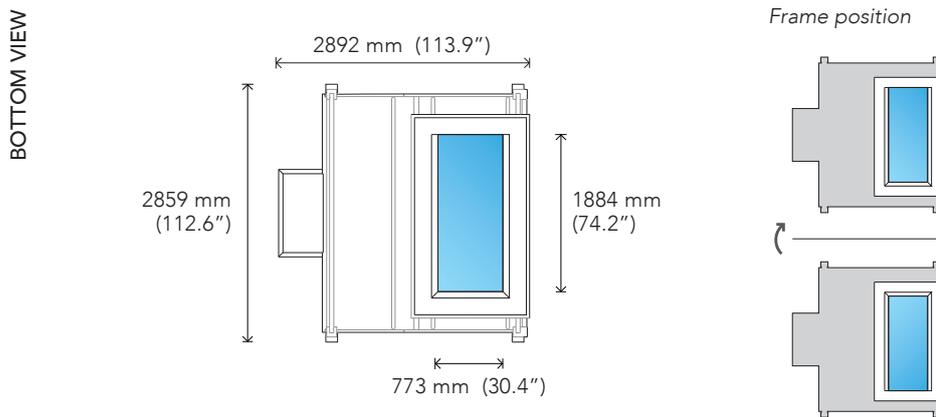

Frame Type: Flush (Wood)

\* Distance from CoeLux system



# CoeLux® 60 HC

## Datasheet/ pg 2 of 2

∞ INFINITE SKY

☀ SHINING SUN

### Technical informations:

DEVICE DIMENSIONS	2892 x 2859 x 1556 mm	113.9 x 112.6 x 61.3"
SKY-LIGHT SIZE	1884 x 773 mm	74.2 x 30.4"
WEIGHT	350 kg	770 lb
SUGGESTED AREA FOR A UNIT	Up to 20 m <sup>2</sup>	215 ft <sup>2</sup>

### Performance informations:

TYPE OF SOURCE	LED not dimmable
POWER INPUT	100-240 V~ 50/60 Hz
MAX POWER CONSUMPTION	300 W
TYPICAL POWER CONSUMPTION	270 W
TOTAL LIGHT OUTPUT	4000 lm
LUMEN MAINTENANCE	LM70 >50000 h

### Environmental informations:

Equipment intended for internal use

MIN. / MAX. OPERATING TEMPERATURE -10°C /40°C

MAX. OPERATING RELATIVE HUMIDITY 95% (non-condensing)

CERTIFIED



> CoeLux® 60 HC, Hotel Alberg, Lech am Arlberg (A)

