


CoeLux® ST TIVANO

Datasheet / pg 1 of 2

Tivano has a more intense feeling. The movement of the sun in the reflectors enhance your feeling of being outside on a sunny day.


Forced perspective plays it part tricking your body to believe in space and warmth of natural light. The window of each module is 530 x 300 mm (20.9 x 11.8"), designed to fit within a standard 600 x 600 mm (or 2 x 2') ceiling grid. This allows easy installation within a T-bar or plasterboard ceiling. It is DALI compatible allowing easy integration into a control system.

Warranty period: 2 years.

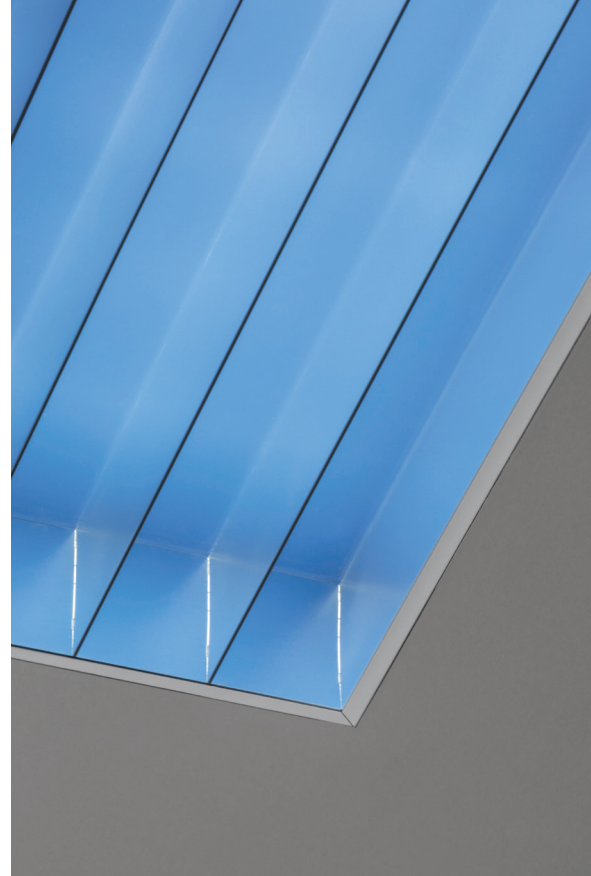


Technical drawings:


BOTTOM VIEW

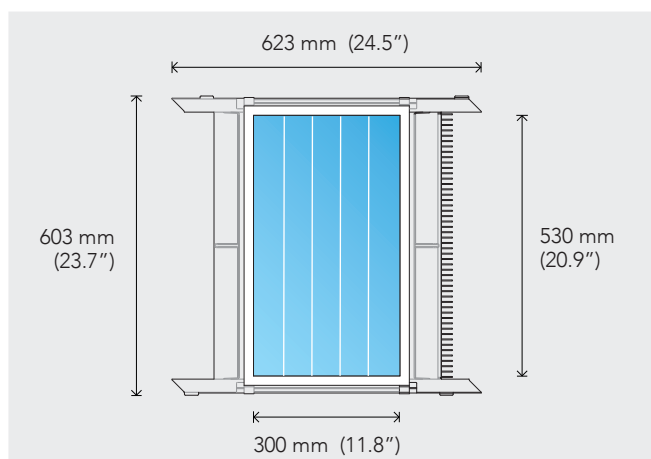


SIDE VIEW

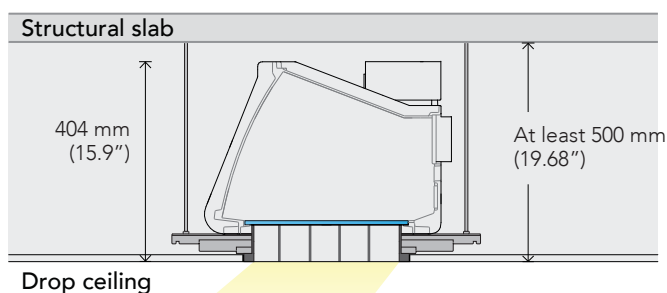

Louvre typologies:




Linear



Grid

Photometric curves:

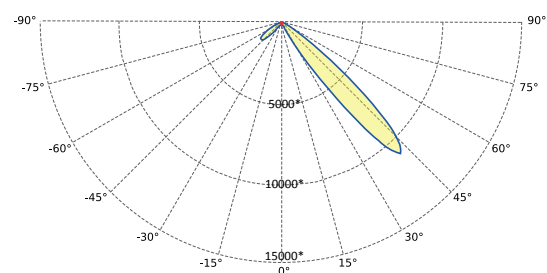

Profile units are

— C0 - 180

— C90 - C270

*cd

Technical informations:

DEVICE DIMENSIONS	571 x 500 x 352 mm	22.5 x 19.7 x 13.9"
OVERALL DIMENSIONS	603 x 623 x 404 mm	23.7 x 24.5 x 15.9"
SKY-LIGHT SIZE	530 x 300 mm	20.9 x 11.8"
WEIGHT	11,9 kg	26.2 lb

Performance informations:

TYPE OF SOURCE	LED dimmable
POWER INPUT	100-240 V~ 50/60 Hz
MAX POWER CONSUMPTION	50 W
TYPICAL POWER CONSUMPTION	45 W
TOTAL LIGHT OUTPUT	2100 lm
LUMEN MAINTENANCE	LM70 >50000 h

Environmental informations:

Equipment intended for internal use

MIN. / MAX. OPERATING TEMPERATURE	-10°C /40°C
MAX. OPERATING RELATIVE HUMIDITY	95% (non-condensing)

CERTIFIED



> CoeLux® ST TIVANO

