

MECHANICAL FEATURES

Device dimensions:	1200 x 600 x h430 mm 47.2 x 23.6 x h16.9 in	Sky-light size:	1086 x 295 mm 42.8 x 11.6 in
Necessary space for installation (largest volume including device, assembled frame, fixing kit):	1200 x 600 x h430 mm 47.2 x 23.6 x h16.9 in	Weight:	24 Kg 55 lb
Fixing kit	The fixing kit includes 4 threaded rods (0.5 m; M6 metric system)		

ELECTRICAL FEATURES

FRAME

Type of source:	LED	Material and Visible dimensions:	HPL, Silver alanod 1200x600xh100 mm / 47.2x23.6xh3.9 in
Light output control:	Dimmable by DALI or 0-10V	Weight:	6 kg / 13 lb
Light output range:	0.1-100%	Finishing:	White, RAL 9010 (horizontal surface) / silver (vertical surfaces)
Power input:	4 channels, 450 mA each channel, 42 Vdc		
Max power consumption:	80 W		
Typical power consumption:	80 W		
Electrical rating	Class III		
Power supply units and drivers:	Not included. Suggested driver: 27-00003-02 (x2)		

DESCRIPTION

Coelux® LS Ice is a recessed ceiling* system that artificially reproduces natural light from the sky and the sun. It includes an LED light source, optical components and a Sky panel, all housed in a plastic structure. Skylight dimensions: 1086 x 295 mm (42.8 x 11.6 in). Appearance of the sun: visible, slightly frosted. Beam direction: 45°. Appearance of the sky: clear. Frame: included (mandatory for optimal yield), reflective. It may also be mounted on normally inflammable surfaces. Inspection hatch: not required.


CERTIFICATIONS

Certifications:	CE, CB, PSE
Certification code:	Coelux LS (Serie 2)
Warranty:	2 years

OPTICAL FEATURES

Total Light Output:	4300 lm
Lumen maintenance(L90B10):	> 50000 h
LED CRI (Ra)	> 92
CCT of transmitted beam:	4800 K
CCT of the Sky:	> 30000 K
Photometric diagram (simulated .ies .ldt file, without frame):	Available
Beam angle:	45°
Divergence- FWHM (H/V)(without frames, refer to photometric curves):	13° / 18°
Sun appearance:	Visible slightly frosted
Sky appearance:	Clear
Melanopic Ratio (Sky):	1,607
Melanopic Ratio (Sun):	0,807

PHOTOMETRIC CURVES

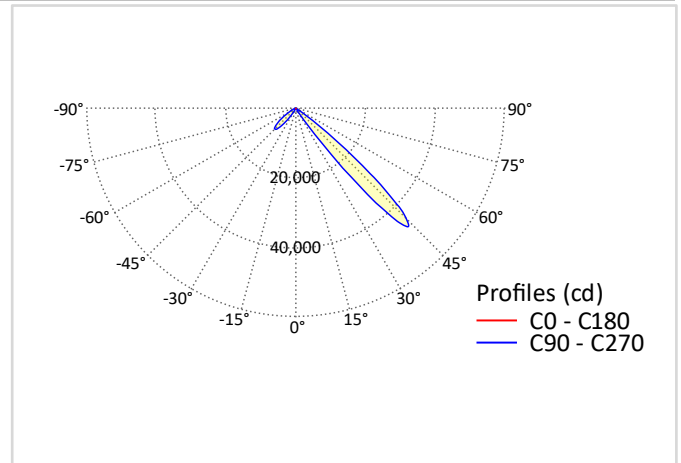

OPERATING CONDITIONS

Min/max operating temperature:	-10/40°C
Max operating relative humidity (no condensing):	95%
IP grade:	IP20 (IP44 only for the sky pannel)

SHIPPING INFORMATION

_ No. 3 Carton boxes:
 1200x500x650 mm / 47.2x19.7x25.6 in - 32 kg / 70.5 lb and
 1250x660x185 mm / 49.2x26.0x7.3 in - 10 kg / 22 lb
 Dimensions and weights may differ depending on packaging and shipping conditions.

ACCESSORIES

- 75-00063-01: CBU-A2D - Casambi wireless control unit configured for Coelux LS Classic DALI
- 75-00064-01: CBU-A2D - Casambi wireless control unit configured for Coelux LS Classic 0-10V

NOTES

Coelux technical sheets and 3D files can be downloaded directly from our website www.coelux.com
 The products here presented are covered by patents and patent applications.
 Details available at www.coelux.com/en/patents/index Coelux reserves the right to carry out variations to technical details.